


5G MMWAVE LAB features:

- Covers 5G band allocated by FCC
- Complete Full-Duplex System
- Frequency Range of 21 GHz to 31 GHz
- ASIC architecture with LNA, PA, I/Q Mixers, Synthesizers, RX/TX Filters and RX/TX Gain Control
- Modular architecture with built-in frequency up/down conversion
- Linux GnuRadio and MATLAB interface

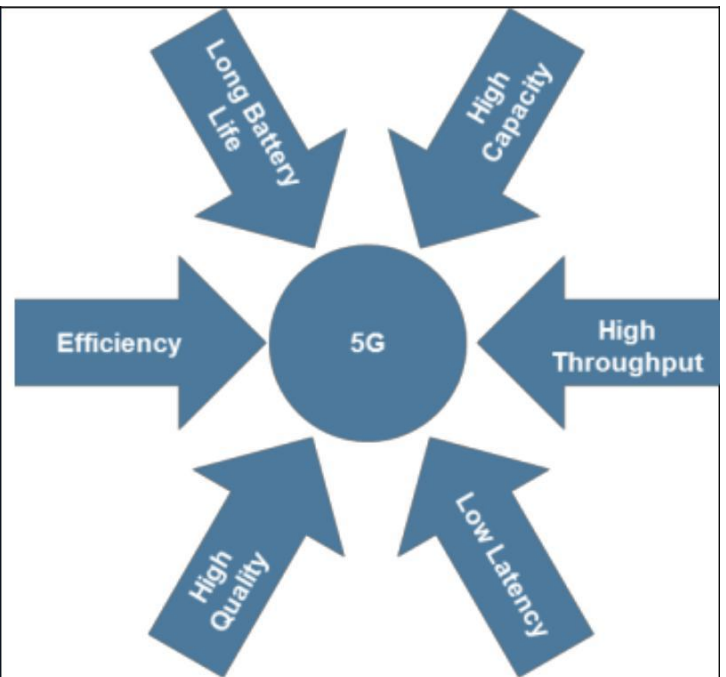

The next generation of wireless networks need to provide enhanced data rates for mobile broadband applications along with low latency and reliability for machine and vehicular communication. Spectrum in conventional cellular frequency bands of 500MHz to 4 GHz is crowded and exorbitantly expensive. Availability of frequency band near mmwave is promising but at the same time provides challenges for researchers. For optimum utilization and mass deployment, there are many challenges which need to be addressed such as development of new algorithms, technologies and air interfaces along with energy efficiency and channel models.

5G MMWAVE LAB is a software programmable hardware transceiver which allows limitless research and development along with laboratory experiments to be performed on a single device. The system is ideally suited for applications requiring high RF performance and great bandwidth such as 5G Physical layer prototyping, Dynamic Spectrum Access and Cognitive Radio, Spectrum Monitoring and even Networked Sensor Deployment.

The system has modular architecture with high performance synthesizers and integrated mixers allowing baseband processing. The system has independently programmable transmitter and receiver sections with programmable frequencies, ADC and DAC sampling rates, filter bandwidths, variable gain amplifiers, LNA and PA.

The entry barrier is lowered to include the graduate students by providing a graphical programming environment. The system also supports interface with MATLAB. The burden on faculty is lowered by using courseware designed at IITD from simple FM to most complex MIMO systems.

The Superspeed USB 3.0 interface at 5Gbps serves as the connection between the baseband section and the mobile workstation. This enables the user to realize 5Gbps of real-time throughput in the receive and transmit directions in full duplex mode.

Transmit Frequency Range	21-31 GHz	
Receive Frequency Range	21-31 GHz	
Mode	Full Duplex	
Architecture	ASIC/FPGA/Zero IF	
Instantaneous Baseband Bandwidth	40 MHz	
Frequency Resolution	< 50Hz	
Maximum RF Output power	+5dBm	
Receiver Sensitivity	-120dBm	
TX Output Impedance	50 Ohms	
RX Input Impedance	50 Ohms	
PLL Phase Noise	-125dBc/Hz at 1MHz	
Spurious Output	-50dBc	
Transmit Gain Control Range	>50dB	
Transmit Gain Control Step	1dB	
Rx Noise Figure	<5dB	
Rx Gain Control Range	>50dB	
Rx Gain Control Step	1dB	
IQ Phase Error	3 degree	
IQ Amplitude Error	0.5dB	
PLL Settling time	20us	
ADC Sample Rate	upto 40 MS/s	
DAC Sample Rate	upto 40 MS/s	
ADC Resolution	12 bits	
DAC Resolution	12 bits	
ADC Wideband SFDR	60 dBc	
Input Amplitude	1Vp/p differential	
DAC Wideband SFDR	60 dBc	
Output Amplitude	250mV p/p differential	
Frequency Accuracy	50ppb (factory calibrated)	
SSB/LO Suppression	>40 dBc	
FPGA	Altera Cyclone	
Integrated Transceiver	3 Gbps	
Logic Elements	40,000	
M9K Memory Blocks	>400	
Embedded Memory	>2000 Kbits	
18bit X18bit Multipliers	>100	
PLL	4	
Maximum User I/Os	>500	
Maximum Channels	>200 Differential	
Cable	High Speed USB 3.0 Serial, Cable, RG316 SMA-SMA X4,	
Antennas	18 - 40 GHz Horn Antenna	
Upgrade	1 year upgrade of new experiments, training videos, operation manuals and firmware	
Shipping List Deliverable	21-31 GHz Transceiver	1
	Horn Antennas	2
	USB3.0 Cable	1
	USB2.0 Cable	1
	Power Supply and Adapter	1
	Manual and Study Material	1

Features	
Compatible with Linux GnuRadio and MATLAB	
Software Features: Audio, Boolean, Byte Operators, Channelizers, Channel Models, Coding, Control Port, Debug Tools, Equalizers, Error Coding, File Operators, Filters, Fourier Analysis, GUI Widgets, Impairment Models, Instrumentation, Level Controllers, Math Operators, Measurement Tools, Message Tools, Modulators, Networking Tools, OFDM, Packet Operators, Resamplers, Sinks, Sources, Stream Operators, Stream Tag Tools, Symbol Coding, Synchronizers, Trellis Coding, Type Converters, Variables, Waveform Generators	<p>Synchronizers: Costas Loop, Clock Recovery, Frequency Locked Loop, Phase Locked Loop, Correlate and Sync, Carrier Acquisition</p> <p>Equalizers: Adaptive-CMA, Kurtotic, LMS DD</p> <p>Filters: IIR, FIR, Pulse Shaping-RRC Root Raised Cosine, High Pass, Low Pass, Bandpass, Band Stop, FFT, Frequency Translating Filter</p> <p>Networking: TCP, UDP, Socket, Broadcasting</p>
Channel Coding and Decoding: Convolutional, Viterbi, Trellis	Constellation diagram, Oscilloscope, Spectrum Analyzer and Waterfall display
<p>Analog Channel Models like: Noise: Uniform, Linear, Laplacian, Gaussian, Phase Noise</p> <p>Interference: Cross talk, Co-channel, Inter-symbol), Distortion (Inter modulation) Frequency Response (Attenuation and phase shift)</p>	<p>Spread spectrum techniques like: CSS, DSSS, FHSS, THSS and other variants</p> <p>Multiplexing techniques like: TDM, FDM/WDM, SDM, Polarization, Spatial, Packet Switching, MC-SS, OFDM including complete control for new research and development</p>
On-air Transmission and Reception using Analog modulation and Demodulation techniques like: AM, DSBSC, SSB, Narrowband FM, Wideband FM, Stereo FM	<p>On-air Transmission and Reception using Digital Modulation and Demodulation techniques like: ASK, FSK, BPSK, DBPSK, MSK, GMSK, DQPSK, QPSK, OQPSK, pi/4QPSK, 8PSK, 16QAM, 64QAM, 256QAM, CPFSK, GFSK and custom modulation schemes</p>
<p>Channel performance measurements</p> <p>Spectral bandwidth</p> <p>Symbol Rate</p> <p>Bit Rate</p> <p>Channel Capacity</p> <p>Channel Utilization</p> <p>Signal to Noise ratio</p> <p>Bit Error Rate BER</p> <p>Latency and Jitter</p>	<p>Fading modeling: Slow, Fast, Selective/Dispersive, Multipath, Rayleigh, Rician</p> <p>Group delay</p> <p>Propagation Doppler Shift</p>

Areas of Research and Development
mmWave and cmWave Systems
Multi-Radio Access Technologies
Channel Sounding Measurements
Physical Layer Technologies
Antenna Design for 5G Cellular Networks
Small Cells
Heterogeneous Networks
Interference Suppression Receivers
Medium Access Control Design
Dynamic Scheduling of Uplink/Downlink Transmission
Cognitive Radio Networks
Co-operative Communication
Spectrum Sensing and Dynamic Spectrum Allocation
New Air Interface and Waveform Design
Contextual Awareness
Vehicular Communication
Low-latency networks
Radio Propagation Measurements
Channel Modelling
Satellite Radio Implementation
RADAR Systems
Multiple-Hop Networks
Machine Type Communication and IoT
Dynamic Adhoc Wireless Networks(DAWN)
MANET and Wireless Mesh Networks
Vandermonde Frequency Division Multiplexing(VFDM)
Wireless Network Virtualization
Massive MIMO



GIGABYTE NETWORKS PVT. LTD.

6th floor, Surya Kiran-II, Sutlej Club Road, Ludhiana-141001, INDIA P: +91-161-2776677, 2776688, 6577889
 Email: info@gigabytesnetworks.com www.gigabytenetworks.in